


SPOOLERS



- Horizontal spooler with axis-pintle principle
- Different spool sizes can be used
- Designed for high wire surface quality with ceramic coated deflection pulleys
- The traverse system has automatic width adjustment

Technical Specifications	SP630	SP800	SP1000	Units
Individual Wire Diameter	0,15 4,50	0,15 4,50	0,15 4,50	mm
Maximum Production Speed	40	40	40	m/s
Maximum Spool Flange	630	800	1000	mm
Minimum Singlewire Diameter	0.10	0.10	0.10	mm
Minimum Cross-section	0.018	0.018	0.018	mm ²
Maximum Cross-section	5.5	5.5	5.5	mm ²
Cylindrical Winding Structure	27	37	77	kW
Machine Dimensions	2,65 x 1,15 x 1,05	2,75 x 1,25 x 1,15	3,10 x 1,65 x 1,55	m
Weight	2100	2300	3800	kg

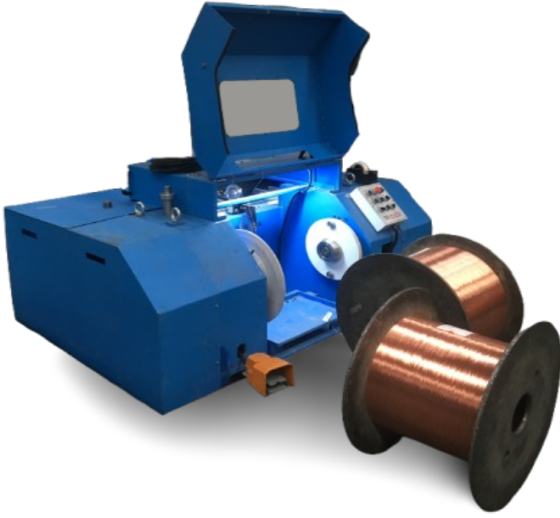

For more informatio..

Sultansazı OSB Mah. 4.Cadde No:12 Melikgazi/KAYSERİ

+90 352 503 00 50

info@emvo.com.tr

+90 352 503 00 51

www.emvo.com.tr

EMVO Inspired by **EXPERTISE**